

# KUNZAR

PERFORMANCE AUDIO

## PROFESSIONAL SERIES

### 15 BOOM 300

Application		Enclosure	
Midrange	<input type="checkbox"/>	Sealed Box	<input checked="" type="checkbox"/>
Mid Bass	<input checked="" type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input type="checkbox"/>	Horn Loading	<input type="checkbox"/>

#### Technical Specifications



Speaker Diameter : 15"  
 Impedance : 8 Ohms  
 Power Rating : 300 Watts  
 Resonance : 43Hz  
 Usable Frequency Range : 55Hz – 1.2 kHz  
 Sensitivity : 98.461 Db

#### Materials of Construction

3" 76.2mm EISV Voice Coil  
 Kapton Former  
 Magnet : 190 mm x 25 mm  
 Fibre Added Air Dried Paper Cone  
 Die Cast Aluminium Basket

#### Thiele & Small Parameters

Fs: 43 Hz | Re: 6 Ohms | Qms: 14.54  
 Qes: 0.49 | Qts: 0.475 | Vas: 275 Liters  
 Cms: 0.19 mm/N | BL: 15.1  
 Mms: 68.3 grams | Xmax: 4mm  
 Xlim: 10mm

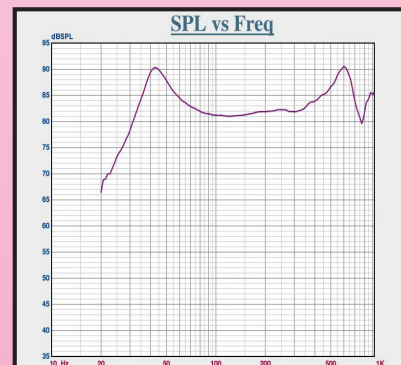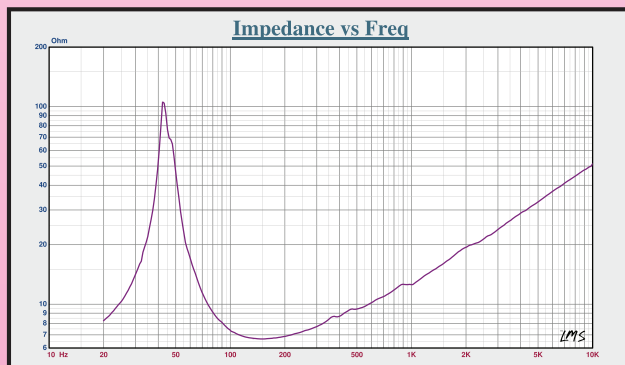

[www.kunzar.com](http://www.kunzar.com)